

X90 Heavy Duty Static Grounding Clamp

Earthing electrostatically charged equipment with certified static earthing clamps is one of the safest and most cost effective methods of ensuring people are protected from static ignitions in potentially flammable or explosive atmospheres.

- **Robust Construction**
Ensures stable and continuous contact with electrostatically charged equipment.
- **Tungsten Carbide Tips**
Penetrating & hard wearing enabling low resistance electrical connection for safe dissipation of static.
- **Stainless Steel**
Corrosion resistant construction extends useful operational life in tough industrial environments.



Best practise standards

(CENELEC CL/TR: 50404 & NFPA77) recommend the use of purpose designed static earthing clamps for **safely dissipating static electricity** in potentially flammable or explosive atmospheres




X90 Static Grounding Clamp



The robust construction of the X90 is the perfect solution for earthing and bonding in Heavy Duty Industrial Environments.

Hard wearing **Tungsten Carbide Tips** penetrate hardened layers of coatings, dirt and rust which can **Inhibit Safe Static Dissipation**

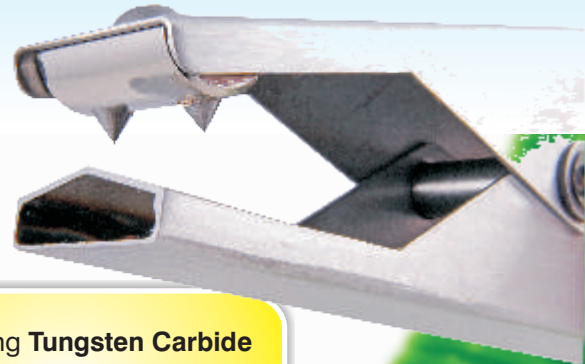

The X90 can be purchased on 20ft (6m), 30ft (9m) and 50ft (15m) **Retractable Cable Reels**

The X90 can be purchased with 3m, 5m or 10m of **CenStat GREEN or ORANGE Retractable Spiral Cable**



The X90 can safely dissipate static from a broad range of plant equipment including:

- Large Containers and Drums
- Tanks
- IBCs
- Mobile Tankers
- Railcar Wagons

The X90 clamp forms part of the Cen-Stat range of Static Grounding and Bonding Equipment available from Newson Gale



Leading the way in hazardous area static control

www.newson-gale.com

Newson Gale Inc
460 Faraday Avenue
Unit B, Suite 1
Jackson, NJ 08527
USA

Tel: +1 732 987 7715

Fax: +1 732 791 2182

Email: groundit@newson-gale.com

Newson Gale Ltd
Omega House
Private Road 8
Colwick, Nottingham
NG4 2JX, UK

Tel: +44 (0)115 940 7500

Fax: +44 (0)115 940 7501

Email: groundit@newson-gale.co.uk